




TM Series – TM6

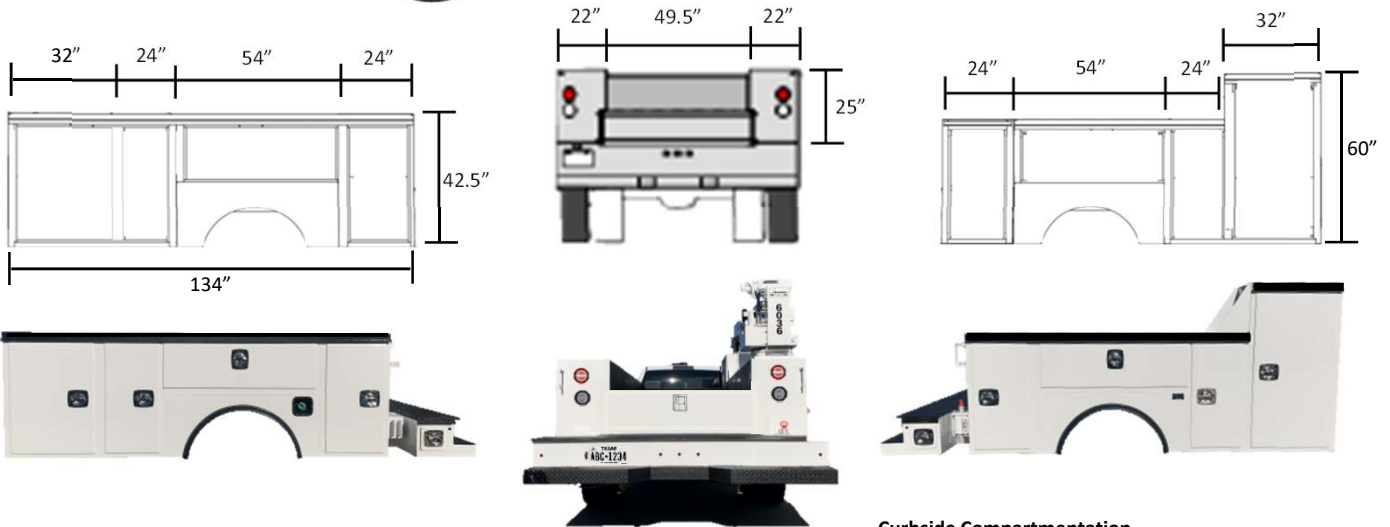

Streetside Compartmentation

- 1st vertical - 32" wide x 42.5" high x 22" deep
Two adjustable divider trays
- 2nd vertical - 24" wide x 42.5" high x 22" deep
Two adjustable divider trays
- Horizontal - 54" wide x 21" high x 22" deep
One fixed divider tray - centered
- Rear vertical - 24" wide x 42.5" high x 22" deep
One adjustable divider tray

Body Dimensions

- 132" Body length
- 49.5" Floor width
- 22" Compartment Depth
- 42.5" Compartment Height
- 25" Floor to top of compartment
- 19" Radius
- 81" UCA

Curbside Compartmentation

- 1st vertical - 32" wide x 60" high x 22" deep
One Ox/AC bracket for two bottles
Installed on back wall
Two vents - high and low on back wall
- 2nd vertical - 24" wide x 42.5" high x 22" deep
Reinforced compartment top for boom rest
6" structural channel
Two adjustable divider trays
- Horizontal - 54" wide x 21" high x 22" deep
Reinforced compartment top for boom rest
One fixed shelf - centered
- Rear vertical - 24" wide x 42.5" high x 22" deep
One reinforcement for up to 6,400 lbs. crane
3/8" wrap - 1" top plate
One 1" plate with crane center hole pattern

Construction Features

Body construction 14 Ga. Galvanneal
Drain holes in bottoms of all compartments
Compartment tops - Smooth 12 Ga. Galvanneal
Load space walls - 12 Ga. Galvanneal
Bulkhead - 12 Ga. Galvanneal
Wheel panels - 12 Ga. Galvanneal
Rubber fenders - shipped loose
Fuel fill - punch for fuel fill in street side wheel panel at rear
DEF Fill - punch for DEF fill in street side wheel panel forward of axle

Floor - 12 Ga. Galvanneal tread plate
Six tie down rings, swivel - 6,000 lbs. - recessed in loads pace floor
Under frame - 4" structural tubing and channel cross-members
Two - 2" structural tubing longills
Two - special rear mounting outrigger shear plates, 1/2"
Eight - Body doors - Double panel 14 Ga. Outers and 18 Ga. Inners
Hidden hinge / beveled edge design
Eight - Gasket - clip on
Eight - Gasket - clip on
Eight - Handles - D-Ring - 3 point stainless steel
Six - Air assist hold open / restraints on vertical doors
Four - Chains on horizontal doors
Masterlocks both sides

Accessory Features

Slam action tailgate - 12" High, double panel 14 Ga. Galvanneal
with stainless brackets, hinge pins, and 2 point paddle handle latch
Platform ext/ work bench - 25" O.A. Depth x full width of body x 13" high
Top surface - 3/8" plate overlaps thru compartment 2" at rear
Top notched on ends for outriggers - 10" notch
Installation of Liftmoore outriggers welded to curbside crane wrap
Thru box - 13" wide x 13" high x 93.5" deep
Punched for FMVSS lighting package
Vertically hinged, single pan door at each end
D-Ring handles – one point - stainless steel
Bumper - Galvanneal tread plate - 8" x full width
Recess for pintle
Installed on thru box
Two Mud flap brackets - under both rear compartments
Stainless steel angles and fasteners
Pre-drilled and shipped loose

Painting Requirements

Undercoating
Primer - standard epoxy – white

Lighting / Electrical Requirements

FMVSS LED lighting package
LED Surface mount tail lights
Combination 4 Inch LED Stop/Turn/Tail/ Strobe
LED Surface mount backup lights
LED Recessed clearance lights - # 33
LED license plate light
Reflectors - surface mounted
FMVSS lights wired in loom

Distributor responsibility

Grab handles
Tie down rails
Safety chain eyes
Headache rack
Trailer tow package
Break-a-way loop
Drawer unit
Trailer plug

Air assist struts with lifetime
Replacement warranty



Hidden hinge system with 3-
way adjustment

3-point locks on all compartment
doors with master lock



Beveled edges and radius corners
on all compartment doors

Compression style D-ring handle



Reversible key-locking cylinder
with cover

Surface mount combination
LED stop/turn/tail/strobe
LED backup light



FMVSS lighting package